


SWWP Submersible Sewage Pumps

PERFORMANCE CHART AT n=2850RPM

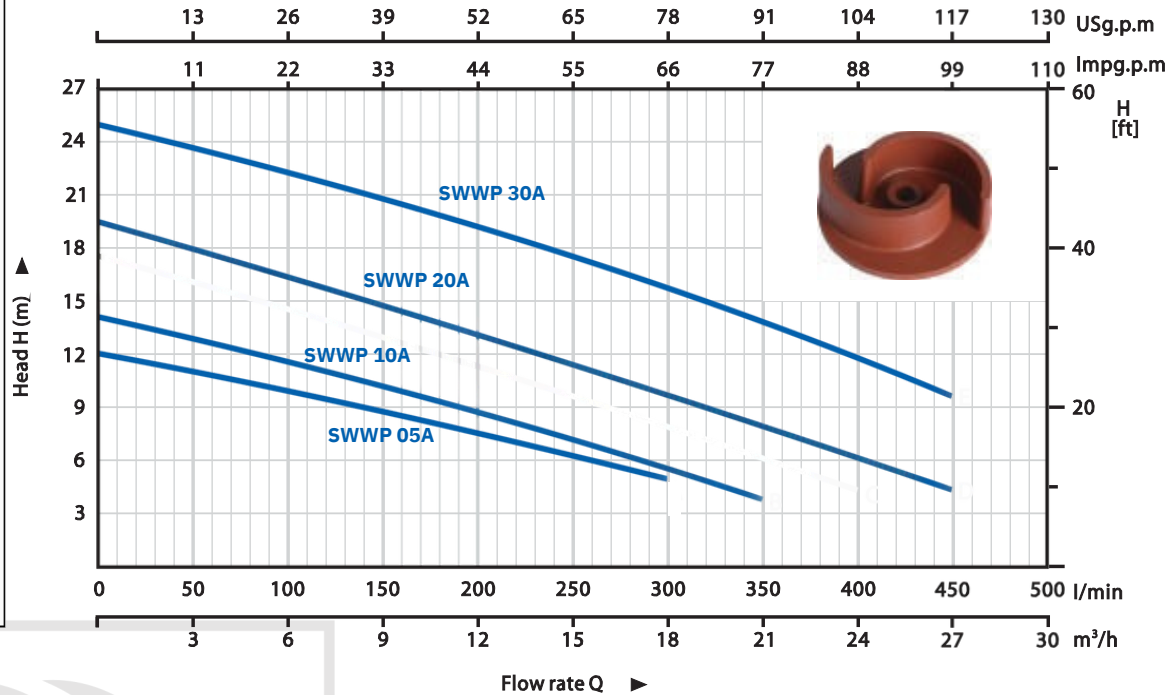

Typical Applications

- Pumping dirty water in industrial settings and construction sites efficiently.
- Discharging domestic wastewater from sinks, showers, and washing machines.
- Emptying collection traps in basements and garages prone to flooding.
- Removing water from sumps and pits containing debris up to 10mm.
- Managing wastewater in rural areas and agricultural settings effectively.
- Draining standing water from outdoor areas like yards and gardens.

Operating Conditions

- **5m maximum immersion depth**
- **Liquid temperature up to 35°C**
- **Maximum ambient temperature 40°C**

Motor

- **Two-pole induction motor (n=2850 r.p.m)**
- **Insulation Class B**
- **Protection IP68**
- **Continuous service S1**
- **Thermal protector for single phase**

Component	Construction
Pump Body	Cast Iron
Cable	6 Meter power cable with plug
Motor Shaft	AISI304 SS
Suction Filter	AISI304 SS

Technical Data

Model	Power		Current (A)	Voltage (V)	OUTLET (Inch)	Dimensions (mm)			Weight (Kg)
	KW	HP				L	W	H	
SWWP 05A	0.55	0.75	4	1x240	2"	270	193	475	14.8
SWWP 10A	0.75	1	5.2	1x240	2"	270	193	485	15.6
SWWP 20A	1.5	2	8.3	1x240	2"	283	207	525	21.3
SWWP 30A	2.2	3	11.5	1x214	2"	283	207	550	22.3

